

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 966 017 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
22.12.1999 Bulletin 1999/51

(51) Int. Cl.<sup>6</sup>: H01J 17/49, H01J 5/16

(21) Application number: 99301043.8

(22) Date of filing: 12.02.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 18.06.1998 JP 17117998

(71) Applicant: FUJITSU LIMITED  
Kawasaki-shi, Kanagawa 211-8588 (JP)

(72) Inventors:  
• Irie, Katsuya,  
c/o Fujitsu Limited  
Kawasaki-shi, Kanagawa 211-8588 (JP)  
• Namiki, Fumihito,  
c/o Fujitsu Limited  
Kawasaki-shi, Kanagawa 211-8588 (JP)


(74) Representative:  
Hitching, Peter Matthew et al  
Haseltine Lake & Co.,  
Imperial House,  
15-19 Kingsway  
London WC2B 6UD (GB)

### (54) Gas discharge display device

(57) A gas discharge display device for displaying a color image by means of red, green and blue fluorescent substances, wherein a color to be reproduced by light-emission of the red, green and blue fluorescent substances for displaying a white pixel is set to be differ-

ent from a white color intended for display, and a filter is disposed on a front side of the red, green and blue fluorescent substances for approximating a display color of the white pixel to the white color intended for display.

FIG. 5A

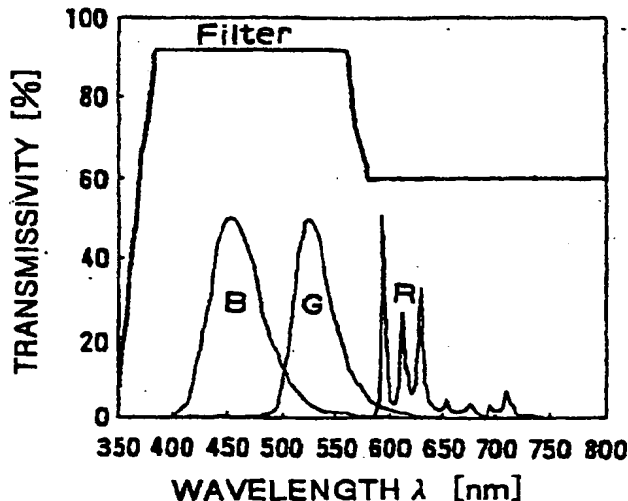

RECEIVED  
JUN - 8 2001  
IC 2800 MAIL ROOM

EP 0 966 017 A2

## Description

[0001] The present invention relates to a gas discharge display device, and more particularly to a plasma display device incorporating a PDP (Plasma Display Panel).

[0002] PDPs are becoming more and more popular as a means for television display on a large screen since their practical application to color display started. One of the problems related to image quality of PDPs is an enlargement of a reproducible color range.

[0003] AC-type PDPs with a three-electrode surface-discharge structure have become commercialized as color display devices. The three-electrode AC surface-discharge PDPs have pairs of main electrodes arranged parallel to each other on individual lines (rows) of matrix display for sustaining light-emission, and address electrodes arranged one by one on individual columns. Ribs for preventing discharge interference among discharge cells are provided in a stripe pattern.

[0004] In the surface-discharge structure, fluorescent layers for color display can be provided on a substrate opposed to the substrate on which the main electrode pairs are placed, and thereby it is possible to prevent the fluorescent layers from being deteriorated by ion impact at electric discharges and to increase the life of the devices. A PDP having the fluorescent layers on a rear substrate is called a "reflection type", and the one having the fluorescent layers on a front substrate is called a "projection type". The reflection-type PDP is superior to the projection-type PDP in light-emission efficiency.

[0005] A Penning gas containing neon (Ne) mixed with a little amount (4 to 5%) of xenon (Xe) has previously been considered for use as a discharge gas. When electric discharge occurs among the main electrodes, the discharge gas emits an ultraviolet light, which in turn excites a fluorescent substance to emit light. Each pixel corresponds to three cells, and a display color is determined and set by controlling the amounts of light-emission of the fluorescent substances of three colors of R (red), G (green), and B (blue). Heretofore, compositions of the fluorescent substances and a ratio of light-emission intensities of the three colors have been selected so that a white display color may be obtained when the amount of light-emission of each of R, G, and B is given the same signal strength.

[0006] Here, a lot of research has been made on the composition of the discharge gas. Examples of previously-considered discharge gases include a three-component gas containing the above-mentioned Penning gas mixed with helium (He) or argon (Ar) (Ne + Xe + He, Ne + Xe + Ar), a two-component gas containing helium and xenon (He + Xe), and a three-component gas containing helium, argon, and xenon (He + Ar + Xe).

[0007] As described above, since the fluorescent substance is caused to emit light by gas discharge in PDPs, a problem arises such that the color emitted from the discharge gas is mixed in with the color emitted from the fluorescent substances.

[0008] Fig. 12, of the accompanying drawings, is a view showing an emission spectrum of a two-component gas containing neon and xenon. In Fig. 12, examples of emission peaks of R, G, and B fluorescent substances are shown by broken lines. As will be understood from Fig. 12, the emission peak of the discharge gas is located near the maximum emission peak (590 nm) of the R fluorescent substance. Therefore, the red color generated by light-emission of the discharge gas is added irrespective of the color reproduced by the fluorescent substances, whereby a reddish display will appear on the entire screen. In other words, the capability of displaying the blue and green colors will decrease. The display color of a white pixel will be a color having a lower color temperature than the color reproduced by the fluorescent substances of the three colors.

[0009] It is desirable to reduce the influence of light-emission of the discharge gas and to increase the color reproducibility.

[0010] An embodiment of the present invention can provide a gas discharge display device for displaying a color image by means of first, second and third fluorescent substances having different emission colors, wherein a color to be reproduced by light-emission of the first to third fluorescent substances for displaying a white pixel is set to be different from a white color intended for display, and a filter is disposed on a front side of the first to third fluorescent substances for approximating a display color of the white pixel to the white color intended for display.

[0011] In an embodiment of the present invention, a filter is disposed for attenuating a light emitted by a discharge gas. Also, in order to compensate for the attenuation by the filter, the white color balance of the color reproduction by the fluorescent substances is intentionally shifted from the optimal value beforehand. For example, if a discharge gas emitting a light having a spectrum shown in Fig. 12 is to be used, the influence of light-emission of the discharge gas can be reduced by employing a red-cutting filter. This is disclosed as a side effect accompanying a shield of near infrared light in Japanese Unexamined Patent Publication No. HEI 09(1997)-145918. However, by merely providing a red-cutting filter, the capability of displaying a red color will decrease because the light of a red region emitted by the fluorescent substance will also be attenuated, even though the display color of the white pixel can be shifted to a blue side on a chromaticity diagram. It is extremely difficult to selectively exclude only the color emitted by the discharge gas.

[0012] Therefore, in an embodiment of the present invention, the emission of light from the fluorescent substances is controlled so that the light within a wavelength region attenuated by the filter will be emitted at an intensity which is

stronger by an amount attenuated by the filter. For example, if a red-cutting filter is to be provided, the amount of red light may be set to be a little larger among the fluorescent substances of R, G and B. By this control, the color temperature value of the color to be reproduced by the fluorescent substances in displaying a white pixel will be lower than a color temperature value of the color (intended white color for display) which has been set as a white display color.

Examples of the ways for allowing the amount of light emitted by a fluorescent substance of one color to be larger than those by the fluorescent substances of the other two colors include adoption of a material having a high luminance and increase of discharge intensity or light-emission area by changing an element structure. Element structures corresponding to the fluorescent substances of the three colors may be made different from each other to provide difference in the amount of light emission.

[0013] Reference will now be made, by way of example only, to the accompanying drawings, in which:

Fig. 1 is a view illustrating a construction of a plasma display device embodying the present invention;

Fig. 2 is a model view illustrating a filter function;

Fig. 3 is a view illustrating a construction of another plasma display device embodying the present invention;

Fig. 4 is an exploded perspective view illustrating a fundamental structure inside a PDP;

Figs. 5A and 5B are views showing a first example of a filter characteristic and a range of color reproduction;

Figs. 6A and 6B are views showing a second example of a filter characteristic and a range of color reproduction;

Figs. 7A and 7B are views showing a third example of a filter characteristic and a range of color reproduction;

Figs. 8A and 8B are views showing a fourth example of a filter characteristic and a range of color reproduction;

Fig. 9 is a plan view illustrating an electrode structure of a PDP according to a second embodiment of the present invention;

Fig. 10 is a cross-sectional view illustrating part of a PDP according to a third embodiment of the present invention;

Fig. 11 is a cross-sectional view illustrating part of a PDP according to a fourth embodiment of the present invention;

Fig. 12, discussed hereinbefore, is a view showing an emission spectrum of two-component gas containing neon and xenon; and

Fig. 13 is a view showing equi-color-temperature lines and equi-deviation lines on an x-y chromaticity diagram.

[0014] An embodiment of the present invention can provide a gas discharge display device for displaying a color image by means of first, second and third fluorescent substances having different emission colors, wherein a color to be reproduced by light-emission of the first to third fluorescent substances for displaying a white pixel is set to be different from a white color intended for display, and a filter is disposed on a front side of the first to third fluorescent substances for approximating a display color of the white pixel to the white color intended for display.

[0015] In a gas discharge display device embodying the present invention, a structural condition of a display element corresponding to the first fluorescent substance may be different from structural conditions of other display elements, and a light-emission intensity of the display element corresponding to the first fluorescent substance may be higher than a light-emission intensity of the display element corresponding to the first fluorescent substance which intensity is required in reproducing a white color intended for display by means of light emission of the display elements corresponding to the first to third fluorescent substances.

[0016] In a gas discharge display device embodying the present invention, each of the display elements may comprise a pair of electrodes for display discharge, a fluorescent substance layer that emits light by means of electric discharge between the electrodes, and dielectric substance layers that cover the respective electrodes, and the structural condition may be an area of the electrodes.

[0017] In a gas discharge display device embodying the present invention, the structural condition may be an area of a light-emission region of the fluorescent substance layer.

[0018] In a gas discharge display device embodying the present invention, the structural condition may be a thickness of the dielectric layers.

[0019] In a gas discharge display device embodying the present invention, a light-emission intensity of a display element corresponding to the first fluorescent substance may be higher than a light-emission intensity of the display element corresponding to the first fluorescent substance which intensity is required in reproducing a white color intended for display by means of light-emission of the display elements corresponding to the first to third fluorescent substances.

[0020] In a gas discharge display device embodying the present invention, the filter may have a color correction function for increasing a color temperature value.

[0021] In a gas discharge display device embodying the present invention, the filter may have a characteristic of attenuating an intensity of light in a red wavelength region.

[0022] In a gas discharge display device embodying the present invention, the filter may have a characteristic such that an average transmissivity of light in a green wavelength region is lower than an average transmissivity of light in a blue wavelength region and higher than an average transmissivity of light in a red wavelength region.

[0023] In a gas discharge display device embodying the present invention, the filter may have a characteristic such that a transmissivity of a shorter wavelength side of a red wavelength region is higher than a transmissivity of a longer wavelength side of the red wavelength region.

[0024] In a gas discharge display device embodying the present invention, the filter may have a characteristic such that a wavelength providing the lowest transmissivity has a value within a range of 560 to 610 nanometers.

[0025] In a gas discharge display device embodying the present invention, the filter may have a characteristic such that absorption peaks appear at least in a wavelength region of 470 to 520 nanometers and in a wavelength region of 560 to 610 nanometers.

[0026] A gas discharge display device embodying the present invention may comprise a substrate that constitutes a display surface with display elements, and the filter may be formed directly on the substrate.

[0027] A gas discharge display device embodying the present invention may comprise a display panel incorporating a discharge space therein with arranged display elements, and the filter may be fabricated separately from the display panel and disposed on a front side of the display panel.

[0028] In a gas discharge display device embodying the present invention, the filter may be a pigment filter.

[0029] In a gas discharge display device embodying the present invention, the filter may be a multi-layer film filter.

[0030] Fig. 1 is a view illustrating a construction of a plasma display device 100 embodying the present invention. Fig. 2 is a model view illustrating a filter function. Fig. 3 is a view illustrating a construction of another plasma display device 200 embodying the present invention.

[0031] Referring to Fig. 1, the plasma display device 100 includes a PDP 1 as a color display panel, a filter 51 formed in close contact with a front surface of the PDP 1, a driving unit 80 for activating (i.e. lighting) each cell in the PDP 1 in accordance with display contents, and an external cover 90. Referring to Fig. 2, the PDP 1 emits lights  $L_R$ ,  $L_G$ ,  $L_B$  of three colors of R, G, B by light-emission of fluorescent substances, and a light  $L_g$  by light-emission of a discharge gas. The filter 51 is designed to have a dimension extending over an entire display surface and an optical characteristic such that the filter 51 selectively attenuates the light  $L_g$ . Referring to Fig. 3, the plasma display device 200 includes a PDP 1b having the same structure as the PDP 1 and a filter 52 disposed on a front side of the PDP 1b. The filter 52 is fabricated separately from the PDP 1b and fixed to the PDP 1b or a frame of a device housing by means of a support (not shown). The filter 52 also has a characteristic to attenuate the light emitted by the discharge gas. A pigment filter utilizing a light absorption by a pigment, a multi-layer film filter utilizing an interference of a multi-layer film, or a different kind of filter may be used as the filter 51 and the filter 52.

[0032] Fig. 4 is an exploded perspective view illustrating a fundamental structure inside the PDP 1.

[0033] The PDP 1 is a three-electrode surface discharge PDP in which pairs of first and second main electrodes X and Y are disposed in parallel for generating an electric discharge for sustaining light-emission, and define cells (display elements) at intersections of the main electrodes X, Y with address electrodes A as third electrodes. The main electrodes X and Y extend in the direction of lines, i.e. in the horizontal direction, on the screen. The second main electrodes Y are used as scanning electrodes to select cells line by line in addressing. The address electrodes A extend in the direction of columns, i.e. in the vertical direction, and are used as data electrodes to select cells column by column in the addressing. A region on a substrate surface where the main electrodes intersect with the address electrodes is a display surface.

[0034] In the PDP 1, a pair of main electrodes X and Y is disposed on each line on an inside surface of a glass substrate 11 which is a base member for a front-side substrate assembly. The line is a row of cells in the horizontal direction on the screen. The main electrodes X and Y each include an electrically conductive transparent film 41 and a metal film (bus conductor) 42 and is covered with a dielectric layer 17 of a low melting point glass of about 30  $\mu\text{m}$  thickness. A protection film 18 of magnesia (MgO) of several thousand  $\text{\AA}$  thickness is disposed on a surface of the dielectric layer 17. The address electrodes A are arranged on an inside surface of a glass substrate 21 which is a base member for a rear-side substrate assembly. The address electrodes A are covered with a dielectric layer 24 of about 10  $\mu\text{m}$  thickness. On the dielectric layer 24, ribs 29 of about 150  $\mu\text{m}$  height are each disposed between the address electrodes A. The ribs 29 are in the form of a linear band in a plan view. These ribs 29 partition a discharge space 30 for each sub-pixel (a unit light-emission area) in the row direction and also define a gap dimension for the discharge space 30. Fluorescent layers 28R, 28G, and 28B of three colors R, G, and B for color display are formed to cover a rear-side inner surface including a portion above the address electrodes A and side walls of the ribs 29. Preferable examples of the fluorescent substances are shown in Table 1.

Table 1

Emission color	Fluorescent substance
R	(Y, Gd) $\text{BO}_3$ : Eu

Table 1 (continued)

Emission color	Fluorescent substance
G	$\text{Zn}_2\text{SiO}_4 : \text{Mn}$
B	$\text{BaMgAl}_{10}\text{O}_{17} : \text{Eu}$

[0035] The discharge space 30 is filled with a discharge gas containing neon as a main component with which xenon (4 to 5%) is mixed. The fluorescent layers 28R, 28G, and 28B are locally excited to emit light by ultraviolet rays radiated by xenon when an electric discharge takes place. The relative ratio of the maximum luminous intensities of R, G, and B in an embodiment of the present invention is set in such a manner that the luminous intensity within the attenuated wavelength region is a little stronger in order to compensate for the attenuation caused by the filter 51 or filter 52 so as to attain the best reproducibility of white color. In other words, if the filter 51 or 52 were not provided, a color different from that of the original image would be reproduced. In the PDP 1 according to this embodiment, the relative ratio of the luminous intensities is set by selecting the materials to be used for the fluorescent layers 28R, 28G, and 28B.

[0036] One pixel for display is composed of three sub-pixels adjacently placed in the row direction and having different emission colors. A structural unit of each sub-pixel is a cell (a display element). Since the ribs 29 are arranged in a stripe pattern, portions of the discharge space 30 which correspond to the individual columns are continuous in the column direction, bridging all the lines. The gap of the electrodes between adjacent lines is set at a value which is sufficiently larger than the surface discharge gap (for example, a value within the range of 80 to 140  $\mu\text{m}$ ) and which can prevent charge coupling in the column direction (for example, a value within the range of 400 to 500  $\mu\text{m}$ ). An addressing discharge is generated between the main electrode Y and the address electrode A in a cell to be activated (in the case of a writing address form) or in a cell to be inactivated (in the case of an erasing address form) to form a charged state in which a suitable amount of wall charge is present only on cells to be activated for each line. Thereafter, an activation-sustaining voltage  $V_s$  is applied between the main electrodes X, Y to generate a surface discharge along the substrate surface in the cells to be activated.

[0037] In the following explanation, it is assumed that a Ne-Xe(4%) Penning gas of a composition capable of light emission having a spectrum distribution shown in Fig. 12 is used as the discharge gas.

[0038] First, with reference to Figs. 5A and 5B, an explanation will be given on a feature that the filters 51, 52 have a characteristic of attenuating an intensity of light in a red wavelength region.

[0039] Figs. 5A and 5B are views showing a first example of a filter characteristic and a range of color reproduction. Referring to Fig. 5A, the transmissivity characteristic of the filter 51 or the filter 52 is shown by a thick solid line and a light emission spectrum distributions of the fluorescent layers are shown by thin solid lines as a reference. Fig. 5B is a view showing a chromaticity diagram, wherein the black solid circle represents the white color displayed by application of an embodiment of the present invention.

[0040] In Fig. 5B, the blank square represents a white color displayed using a previously-considered PDP and the broken line shows a range of color reproduction using a previously-considered PDP. The previously-considered PDP as referred to herein is a technique that sets the emission luminances of the three fluorescent substances so as to obtain the best possible white color reproducibility without using a filter for color correction (the luminance ratio of G, R, B = 6 : 3 : 1). The later-mentioned Figs. 6A and 6B to 8A and 8B are drawn in the same manner as in Figs. 5A and 5B.

[0041] The filter characteristic shown in the example of Figs. 5A and 5B is such that the transmissivities of the visible light beams in the emission wavelength region of the R (red) fluorescent substance and in a region of emission wavelength longer than the above (i.e. the emission wavelength region of neon) are lower than the average transmissivity in the other visible light wavelength region. By intentionally increasing the light emission of the R fluorescent substance in accordance with the filter characteristic to secure a sufficient amount of light in the red wavelength region to reproduce the red color, it is possible to realize a display which is excellent in color purities of R, G, B with increased color reproducibility as compared with previously-considered PDPs and in which the chromaticity of the white color display has a value desirable as an image display means, as shown in Fig. 5B. The chromaticity of each color in Fig. 5B is shown in Table 2 together with that of the previously-considered PDP.

Table 2

	White		Red		Green		Blue	
	x	y	x	y	x	y	x	y
Present invention	0.30	0.33	0.62	0.36	0.23	0.66	0.17	0.09
Previously-considered PDP	0.31	0.34	0.60	0.35	0.27	0.65	0.18	0.13

[0042] Next, with reference to Figs. 6A and 6B, an explanation will be given on a feature that the filters 51, 52 have a characteristic such that an average transmissivity of light in a green wavelength region is lower than an average transmissivity of light in a blue wavelength region and higher than an average transmissivity of light in a red wavelength region.

[0043] Figs. 6A and 6B are views showing a second example of a filter characteristic and a range of color reproduction.

[0044] The filter characteristic shown in the example of Figs. 6A and 6B is such that the transmissivity of visible light beams in the red wavelength region is the same as that shown in Figs. 5A and 5B, and the average transmissivity of visible light beams in the wavelength region of the G fluorescent substance is lower than the average transmissivity of visible light beams in the wavelength region of the B fluorescent substance and is higher than the average transmissivity of visible light beams in the wavelength region of the R fluorescent substance. This may optimize the chromaticity of the white color display and the color temperature value to a greater degree than the example shown in Figs. 5A and 5B. The chromaticity of each color in Fig. 6B is shown in Table 3 together with that of the previously-considered PDP.

Table 3

	White		Red		Green		Blue	
	x	y	x	y	x	y	x	y
Present invention	0.31	0.31	0.62	0.35	0.24	0.65	0.17	0.08
Previously-considered PDP	0.31	0.34	0.60	0.35	0.27	0.65	0.18	0.13

[0045] Next, with reference to Figs. 7A, 7B and Figs. 8A, 8B, an explanation will be given on a feature that the filters 51, 52 have a characteristic such that a transmissivity of a longer wavelength side of a red wavelength region is higher than a transmissivity of a shorter wavelength side of the red wavelength region. Especially, in Figs. 7A, 7B, an explanation will be given on a feature that the filters 51, 52 have a characteristic such that a wavelength providing the lowest transmissivity has a value within a range of 560 to 610 nanometers; and in Figs. 8A, 8B, an explanation will be given on a feature that the filters 51, 52 have a characteristic such that absorption peaks appear at least in a wavelength region of 470 to 520 nanometers and in a wavelength region of 560 to 610 nanometers.

[0046] Figs. 7A and 7B are views showing a third example of a filter characteristic and a range of color reproduction.

[0047] The filter characteristic shown in the example of Figs. 7A and 7B is such that the filter shows an absorption peak within a region of 560 to 610 nm at which the emission peak of the discharge gas appears, thereby to efficiently remove the color emitted by the discharge gas. Also, the filter has a characteristic such that the transmissivity of a longer wavelength side of the red wavelength region of the R fluorescent substance is higher than the transmissivity of a shorter wavelength side of the red wavelength region. This provides an effect that the light beams which are emitted by the R fluorescent substance and which does not overlap with the emission peak of the discharge gas can be effectively utilized for displaying, thereby improving the capability of expressing the red color. The chromaticity of each color in Fig. 7B is shown in Table 4 together with that of the previously-considered PDP.

Table 4

	White		Red		Green		Blue	
	x	y	x	y	x	y	x	y
Present invention	0.27	0.32	0.63	0.34	0.21	0.67	0.16	0.08
Previously-considered PDP	0.31	0.34	0.60	0.35	0.27	0.65	0.18	0.13

[0048] Figs. 8A and 8B are views showing a fourth example of a filter characteristic and a range of color reproduction.

[0049] The filter characteristic shown in the example of Figs. 8A and 8B is such that the transmissivity of visible light beams in the red wavelength region is the same as that shown in Figs. 7A and 7B, and the filter shows an absorption peak in a wavelength region of 470 to 520 nanometers so as to clearly separate the emission of B color from the emission of G color. This may realize a display with excellent color purities of G and B in addition to an improvement in the reproducibility of white color. The chromaticity of each color in Fig. 8B is shown in Table 5 together with that of the previously-considered PDP.

Table 5

	White		Red		Green		Blue	
	x	y	x	y	x	y	x	y
Present invention	0.28	0.32	0.63	0.34	0.22	0.67	0.16	0.08
Previously-considered PDP	0.31	0.34	0.60	0.35	0.27	0.65	0.18	0.13

[0050] In adopting any of the above-mentioned characteristics, it is required that the filter 51, 52 is disposed on the front side of the discharge space 30. However, there may be various choices in the form of disposing the filters. Although it is possible to dispose the filter 51, 52 on the inside of the glass substrate 11 of the PDP 1, it is preferable to dispose the filter 51, 52 on the outside of the glass substrate 11 from the view point of selection of the materials and the manufacturing steps. The filter 51, 52 may be formed either directly on the outer surface of the glass substrate 11 or on a protection plate (reinforced glass or acrylic resin plate) disposed on the front side of the glass substrate 11 through the intermediary of an air layer (gap) having a thickness of about 1.5 to 6 mm for shutting off heat generated from the PDP. If a layer having the above-mentioned characteristics is to be formed to fabricate the filter 51, 52 with a base material different from that of the glass substrate 11 or the protection plate, the base material may be a glass, an acrylic resin, a polycarbonate resin, a polymer film, or the like. From a practical point of view, the filter 51, 52 is preferably a film-like filter. For example, a desired transmissivity characteristic may be made by dispersing a suitable pigment on a surface of a polymer film and pasting the obtained film-like filter on the glass substrate 11 or the protection film. In Fig. 3 as described above, the portion encircled by a chain line shows an example in which the film-like filter 53 is pasted on the inner surface of the protection plate 54 made of reinforced glass or acrylic resin plate. In this example, an electro-magnetic shielding film 55 and a light-reflection preventive film 56 are further laminated in this order on the outer surface of the protection plate. The pigment that attenuates the light in the emission wavelength region of the discharge gas may be, for example, 1-ethyl-4-[(1-ethyl-4(1H)-quinolinyldiene)methyl]quinolinium iodide having an absorption maximum at 590 nm (Product No. NK-6 manufactured by Nippon Kanko Shikiso Kenkyusho Co., Ltd. in Japan), or 3-ethyl-2-[3-(1-ethyl-4(1H)-quinolinyldiene)-1-propenyl]benzoxazolium iodide having an absorption maximum at 594 nm (Product No. NK-741 manufactured by Nippon Kanko Shikiso Kenkyusho Co., Ltd.). The desired characteristics may be obtained by adjusting the amounts of these pigments and other pigments to be added. If a multi-layer film is to be used as the filter 51, 52, the layers of the multi-layer film may be laminated by means of a thin film formation technique such as vapor deposition, sputtering, CVD, or the like.

[0051] In the PDP 1 of the above-mentioned embodiment, the emission of light in a wavelength region which is to be attenuated by the filter is increased (intensified) by selecting a material for the fluorescent substances while maintaining the cell structures for the R, G, and B colors to be the same. In the following embodiments, the ratio of the emission intensities of the R, G, and B colors is set by allowing the cells to have different cell structures.

[0052] Next, with reference to Fig. 9, an explanation will be given on a feature that the area of the electrodes in the red display element is larger than an area of the electrodes in the red display element which area is required in reproducing the white color intended for display.

[0053] Fig. 9 is a plan view illustrating an electrode structure of a PDP 2 according to a second embodiment of the present invention.

[0054] The PDP 2 also has a three-electrode surface-discharge structure and its basic construction is the same as that of the PDP 1. A fluorescent layer (not shown) is disposed between adjacent ribs 229 arranged in a stripe-like pattern. Three consecutive cells arranged in parallel in the direction of arranging the ribs (i.e. in the row direction) constitute one pixel. In the PDP 2, the electrically-conductive transparent film 241 and the metal film 242, which constitute the main electrodes, do not have uniform widths. Namely, the electrically conductive transparent film 241 above the R cells protrudes into the surface discharge gap and, in accordance therewith, the metal film 242 is formed to have a locally wider portion, as shown in Fig. 9. This structure allows the R cells to have a larger electrode area than the G cells or the B cells, whereby the discharge intensity of the R cells in this embodiment is increased as compared with the R cells of the previously-considered PDP in which the luminance ratio of R, G, and B is set to be a value (3 : 6 : 1) for reproducing the white color of intended display. The same effect may also be obtained by allowing only the electrically conductive transparent film 241 to have a locally wider portion.

[0055] Next, with reference to Fig. 10, an explanation will be given on a feature that the area of the light-emission region of the fluorescent substance layer in the red display element is larger than an area of the light-emission region of the fluorescent substance layer in the red display element which area is required in reproducing the white color intended for display.

[0056] Fig. 10 is a cross-sectional view illustrating part of a PDP 3 according to a third embodiment of the present

invention.

[0057] Address electrodes 3A and ribs 329 are arranged on a glass substrate 321 located on the rear side of the PDP 3, and fluorescent layers 328R, 328G, and 328B are formed between the ribs 329. In the PDP 3, the dimension D1 of the R cells in the line direction is longer than the each of the dimensions D2, D3 of the G cells and the B cells in the line direction. In other words, the emission area for the R color is larger than each of the emission areas for the G color and the B color to allow the R cells of this embodiment to generate a stronger discharge than the R cells of the previously-considered PDP.

[0058] Next, with reference to Fig. 11, an explanation will be given on a feature that the thickness of the dielectric substance layers covering the electrodes in the red display element is smaller than a thickness of the dielectric substance layers covering the electrodes in the red display element which thickness is required in reproducing the white color intended for display.

[0059] Fig. 11 is a cross-sectional view illustrating part of a PDP 4 according to a fourth embodiment of the present invention.

[0060] Main electrodes 412 and a dielectric layer 417 are disposed on an inner surface of a glass substrate 411 located on the front side of the PDP 4. Address electrodes 4A and ribs 429 are arranged on a glass substrate 421 located on the rear side of the PDP 4, and fluorescent layers 428R, 428G, and 428B are formed between the ribs 429. In the PDP 4, the dielectric layer 417 above the R cells has a smaller thickness than the dielectric layer 417 above the G cells or the B cells, whereby the discharge intensity of the R cells in this embodiment is increased as compared with the R cells of the previously-considered PDP.

[0061] Hereto, the color temperature characteristic which has been described up to now is added. To increase the color temperature value, which is the feature of the present invention, is to set the chromaticity of white color to have coordinate values with higher color temperature on a color temperature curve chart as shown in Fig. 13. Fig. 13 is cited from "Television Technology Handbook", Video Information Media Society ed., 1998, p. 20, and shows equi-color-temperature lines and equi-deviation lines on an x-y chromaticity diagram. In an embodiment of the present invention, it is preferable that a color temperature to be reproduced by light-emission of the first to third fluorescent substances for displaying white pixel is set to be about 1000K lower than the color temperature of white color intended for display to cut the color emitted from the discharge gas effectively. Here, it is known that the preferable color temperature value varies in accordance with the system requirements or the region in which the device is used. For instance, in Japan, people prefer a color temperature value of about 9000K. However, the value of about 6000K is preferred in Europe and the United States of America. In an embodiment of the present invention, it is possible to obtain a preferable color temperature value which complies with each of the system requirements or the region in which the device is used, by combining the emission luminance rate of the three fluorescent substances and the transmissivity characteristic of the filter.

[0062] Here, if a discharge gas other than the Ne-Xe Penning gas is to be used, the filter characteristic may be set so that the color emitted by the discharge gas is removed and the emission intensity of the light in the wavelength region which is attenuated by the filter is increased. Also, the filter for removing the color emitted by the discharge gas may be combined with individual built-in R, G, B filters that are disposed for improving the color purity in each of R, G, and B cells. Further, the emission intensity of the R color may be increased by varying the voltages supplied to the electrodes instead of varying the cell structures as mentioned above. The present invention can also be applied in other embodiments to a display using a gas discharge device other than the PDP.

[0063] As shown and described above, a gas discharge display device embodying the present invention can reduce the influence of light-emission by discharge gas and increase the color reproducibility.

[0064] Although embodiments of the present invention have been fully described by way of example with reference to the accompanying drawings, it is to be understood that various changes and modifications will be apparent to those skilled in the art. Therefore, unless otherwise such changes and modifications depart from the scope of the invention, they should be construed as being included therein.

## Claims

1. A gas discharge display device for displaying a color image by means of first, second and third fluorescent substances having different emission colors, wherein a color to be reproduced by light-emission of the first to third fluorescent substances for displaying a white pixel is set to be different from a white color intended for display, and a filter is disposed on a front side of the first to third fluorescent substances for approximating a display color of the white pixel to the white color intended for display.
2. The gas discharge display device of claim 1, wherein a structural condition of a display element corresponding to the first fluorescent substance is different from structural conditions of other display elements, and a light-emission intensity of the display element corresponding to the first fluorescent substance is higher than a light-emission intensity of the display element corresponding to the first fluorescent substance which intensity is required in repro-



ducing a white color intended for display by means of light emission of the display elements corresponding to the first to third fluorescent substances.

- 5 3. The gas discharge display device of claim 2, wherein each of the display elements comprises a pair of electrodes for generating electric discharge between the electrodes to allow the fluorescent substances to emit light, and the structural condition is an area of the electrodes.
- 10 4. The gas discharge display device of claim 3, wherein the area of the electrodes in the display element corresponding to the first fluorescent substance is larger than an area of the electrodes in the display element corresponding to the first fluorescent substance which area is required in reproducing the white color intended for display by means of the light emission of the display elements corresponding to the first to third fluorescent substances.
- 15 5. The gas discharge display device of claim 2, wherein each of the display elements comprises a pair of electrodes for generating electric discharge between the electrodes to allow the fluorescent substances to emit light, and the structural condition is an area of a light-emission region of the fluorescent substance.
- 20 6. The gas discharge display device of claim 5, wherein the area of the light-emission region of the fluorescent substance layer in the display element corresponding to the first fluorescent substance is larger than an area of the light-emission region of the fluorescent substance layer in the display element corresponding to the first fluorescent substance which area is required in reproducing the white color intended for display by means of the light emission of the display elements corresponding to the first to third fluorescent substances.
- 25 7. The gas discharge display device of claim 2, wherein each of the display elements comprises a pair of electrodes for generating electric discharge between the electrodes to allow the fluorescent substances to emit light and dielectric substance layers that cover the respective electrodes, and the structural condition is a thickness of the dielectric layers.
- 30 8. The gas discharge display device of claim 7, wherein the thickness of the dielectric substance layers in the display element corresponding to the first fluorescent substance is smaller than a thickness of the dielectric substance layers in the display element corresponding to the first fluorescent substance which thickness is required in reproducing the white color intended for display by means of the light emission of the display elements corresponding to the first to third fluorescent substances.
- 35 9. The gas discharge display device of any preceding claim, wherein a light-emission intensity of a display element corresponding to the first fluorescent substance is higher than a light-emission intensity of the display element corresponding to the first fluorescent substance which intensity is required in reproducing a white color intended for display by means of light-emission of the display elements corresponding to the first to third fluorescent substances.
- 40 10. The gas discharge display device of any preceding claim, wherein the filter has a color correction function for increasing a color temperature value.
- 45 11. The gas discharge display device of any preceding claim, wherein the filter has a characteristic of attenuating an intensity of light in a red wavelength region.
- 50 12. The gas discharge display device of any preceding claim, wherein the filter has a characteristic such that an average transmissivity of light in a green wavelength region is lower than an average transmissivity of light in a blue wavelength region and higher than an average transmissivity of light in a red wavelength region.
- 55 13. The gas discharge display device of any preceding claim, wherein the filter has a characteristic such that a transmissivity of a longer wavelength side of a red wavelength region is higher than a transmissivity of a shorter wavelength side of the red wavelength region.
14. The gas discharge display device of any preceding claim, wherein the filter has a characteristic such that a wavelength providing the lowest transmissivity has a value within a range of 560 to 610 nanometers.
15. The gas discharge display device of any preceding claim, wherein the filter has a characteristic such that absorption peaks appear at least in a wavelength region of 470 to 520 nanometers and in a wavelength region of 560 to

610 nanometers.

- 5 16. The gas discharge display device of any preceding claim, wherein the gas discharge display device comprises a pair of substrates for forming a discharge space therebetween, and the filter is formed directly on an inner or outer surface of one of the substrates that constitutes a display surface.
- 10 17. The gas discharge display device of any preceding claim, wherein the gas discharge display device comprises a display panel incorporating a discharge space therein with arranged display elements, and the filter is fabricated separately from the display panel and disposed on a front side of the display panel.
- 15 18. The gas discharge display device of any preceding claim, wherein the gas discharge display device comprises a display panel incorporating a discharge space therein with arranged display elements and a transparent protection plate for protecting a display surface of the display panel, and the filter is disposed on an inner or outer surface of the protection plate.
- 20 19. The gas discharge display device of any preceding claim, wherein the filter is a pigment filter.
- 25 20. The gas discharge display device of any of claims 1 to 18, wherein the filter is a multi-layer film filter.
- 30 21. The gas discharge display device of any preceding claim, wherein the first fluorescent substance is a fluorescent substance for red composed of  $(Y, Gd) BO_3 : Eu$ , the second fluorescent substance is a fluorescent substance for green composed of  $Zn_2SiO_4 : Mn$  and the third fluorescent substance is a fluorescent substance for blue composed of  $BaMgAl_{10}O_{17} : Eu$ .
- 35 22. The gas discharge display device of any preceding claim, wherein the gas discharge display device has a discharge space filled with a Penning gas composed of neon and xenon as a discharge gas.

FIG. 1

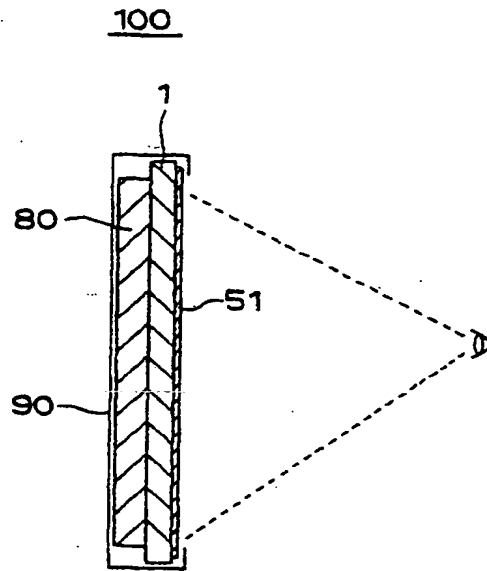


FIG. 2

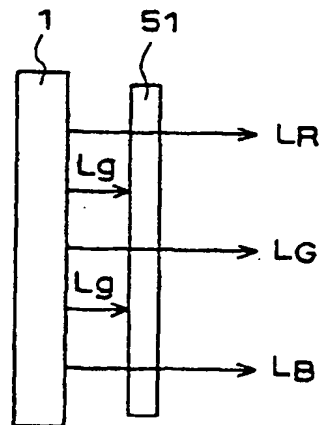


FIG. 3

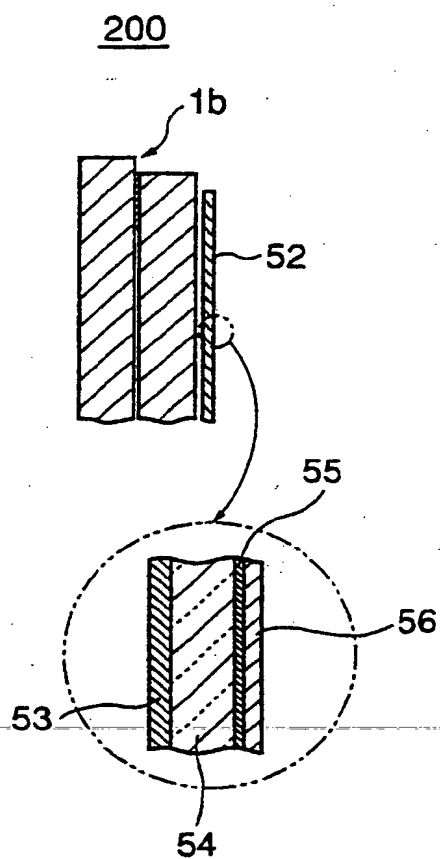


FIG. 4

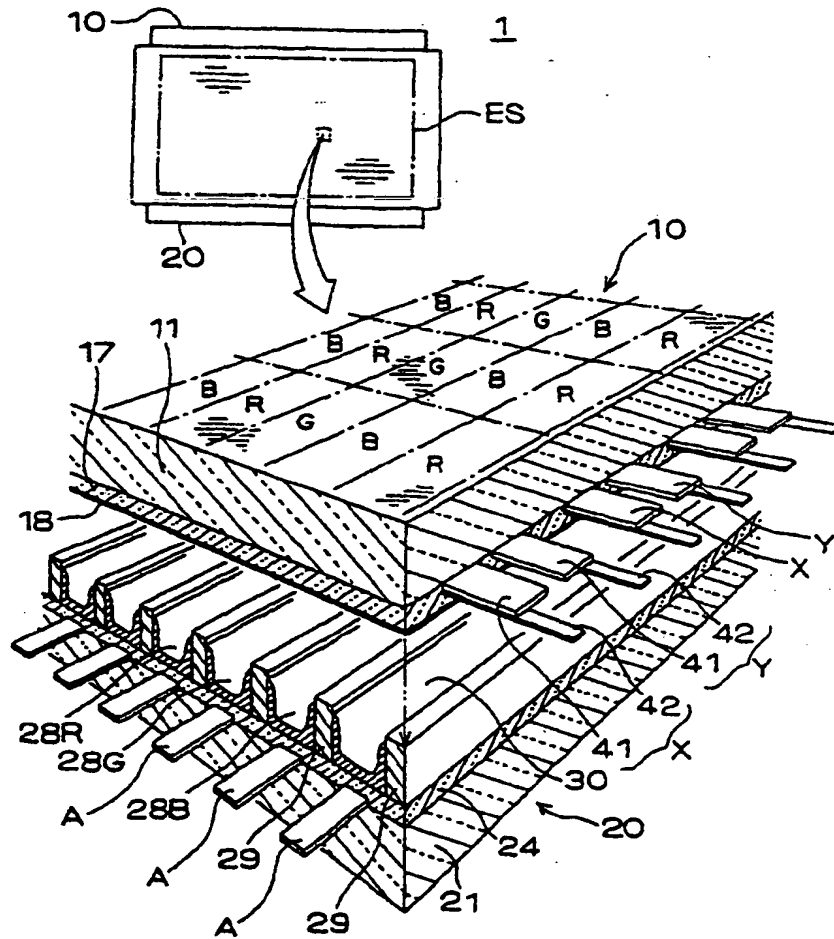


FIG. 5A

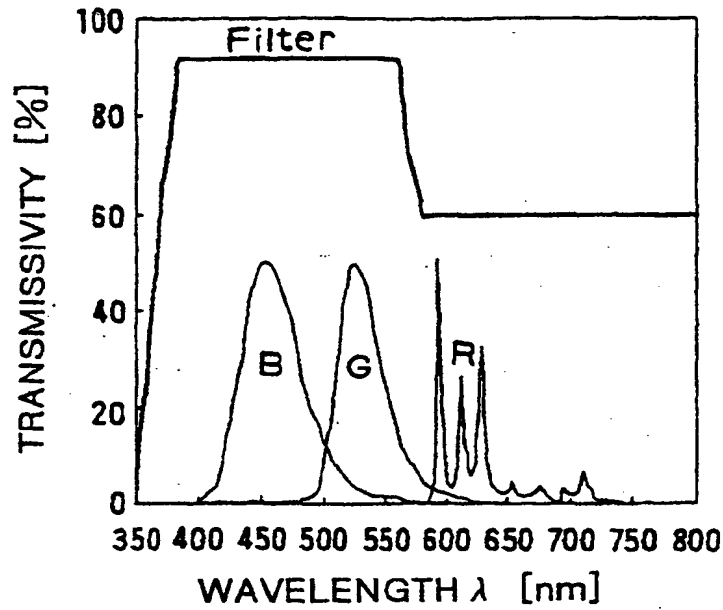


FIG. 5B

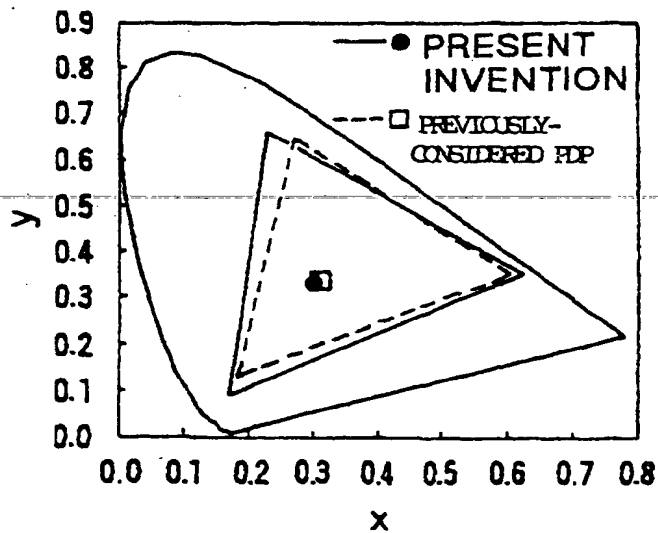


FIG. 6A

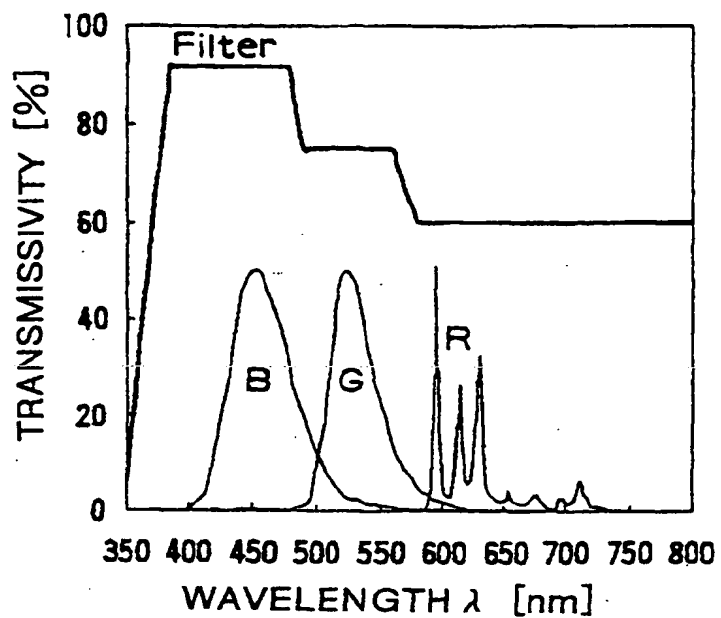


FIG. 6B

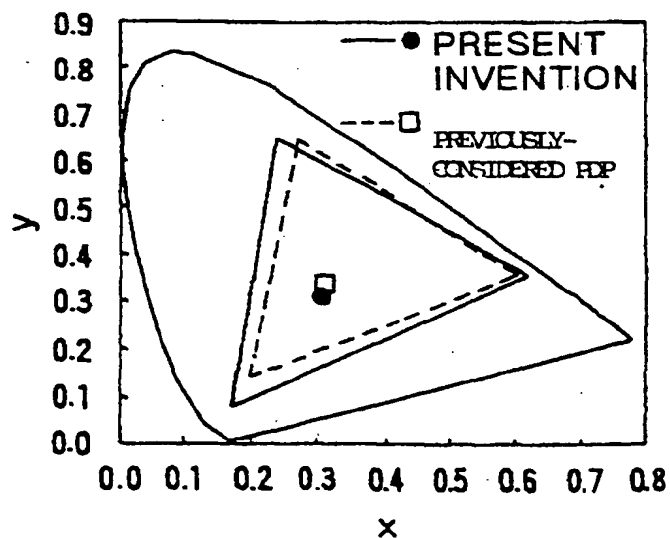


FIG. 7A

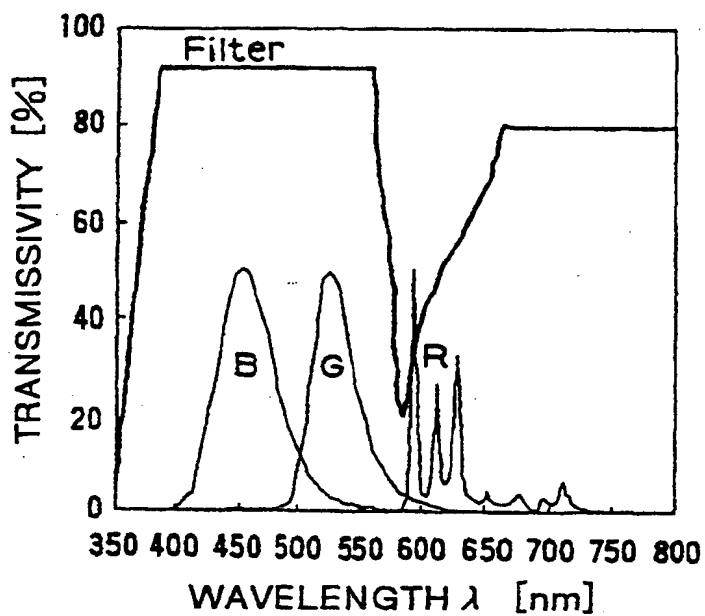


FIG. 7B

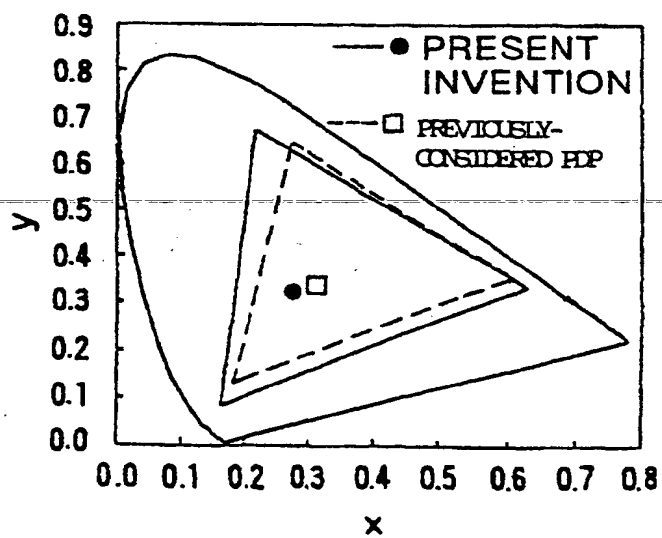




FIG. 8A

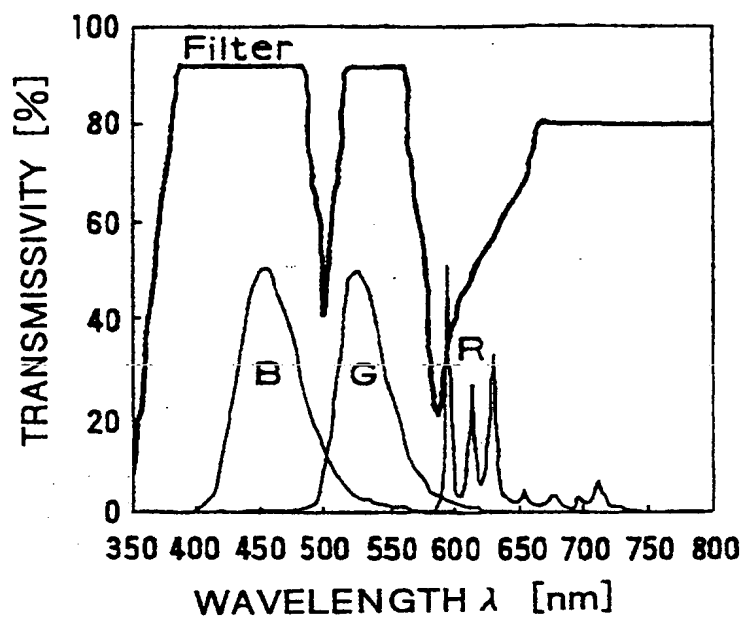


FIG. 8B

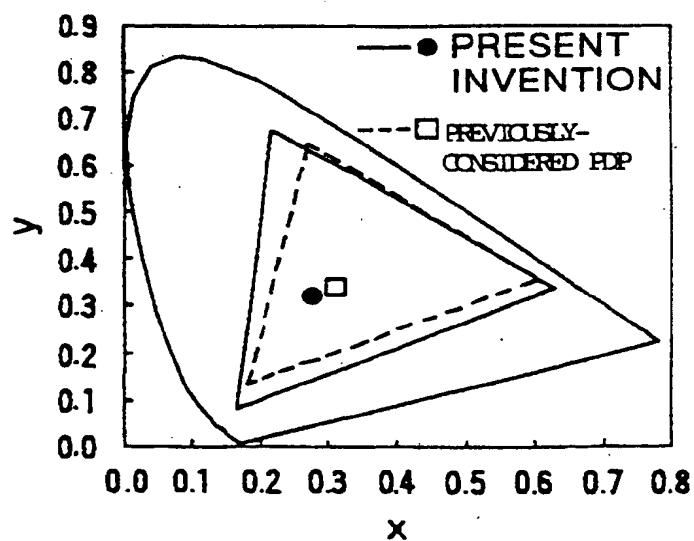


FIG. 9

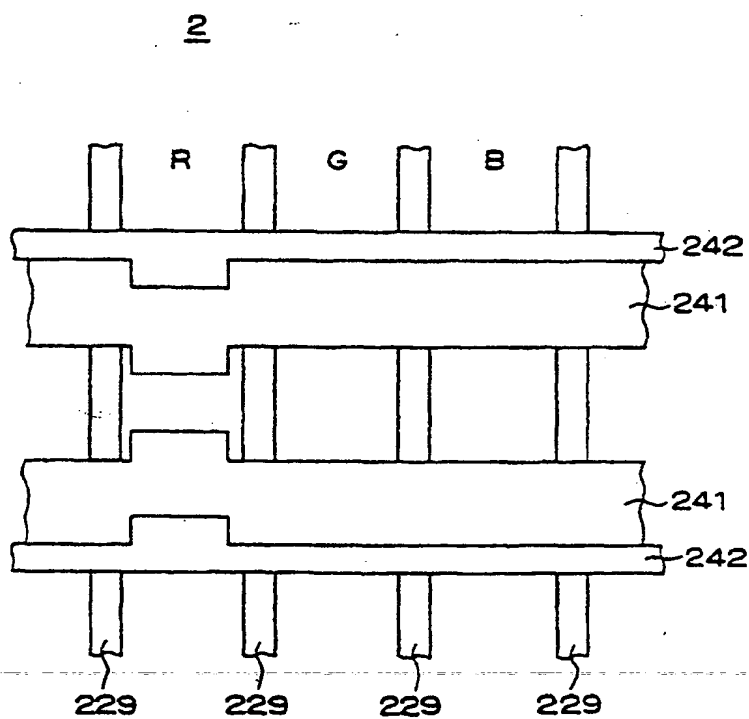


FIG. 10

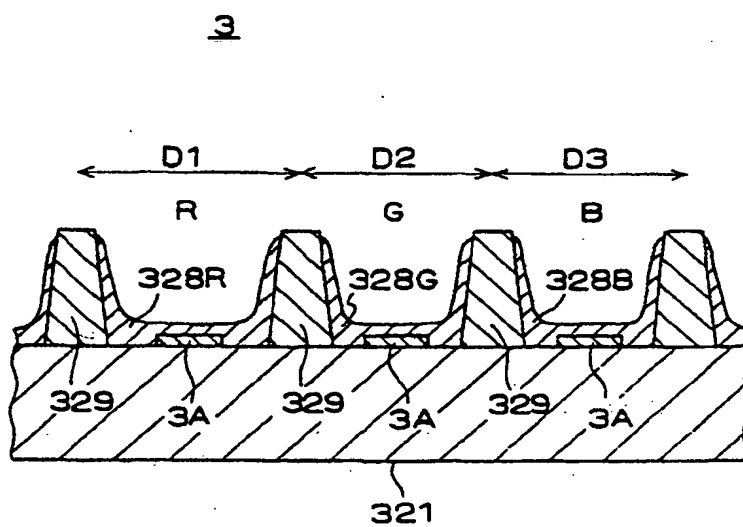


FIG. 11

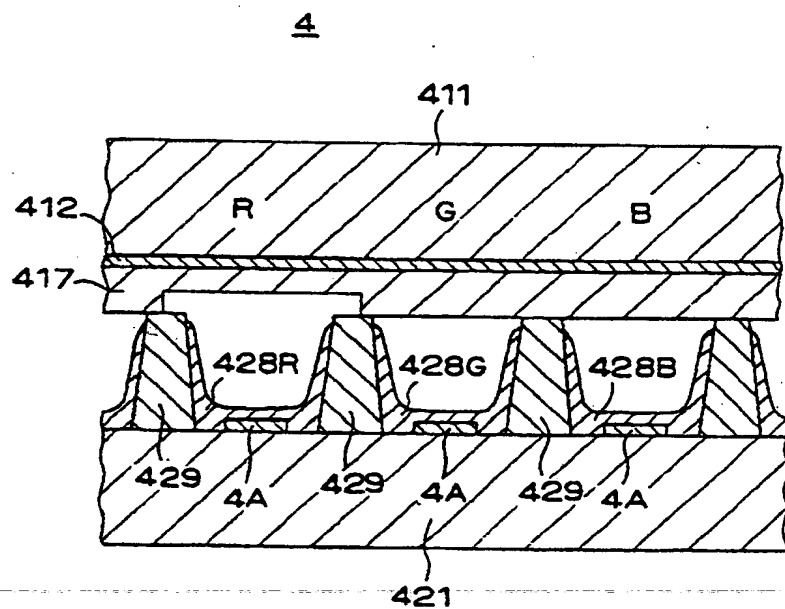


FIG. 12


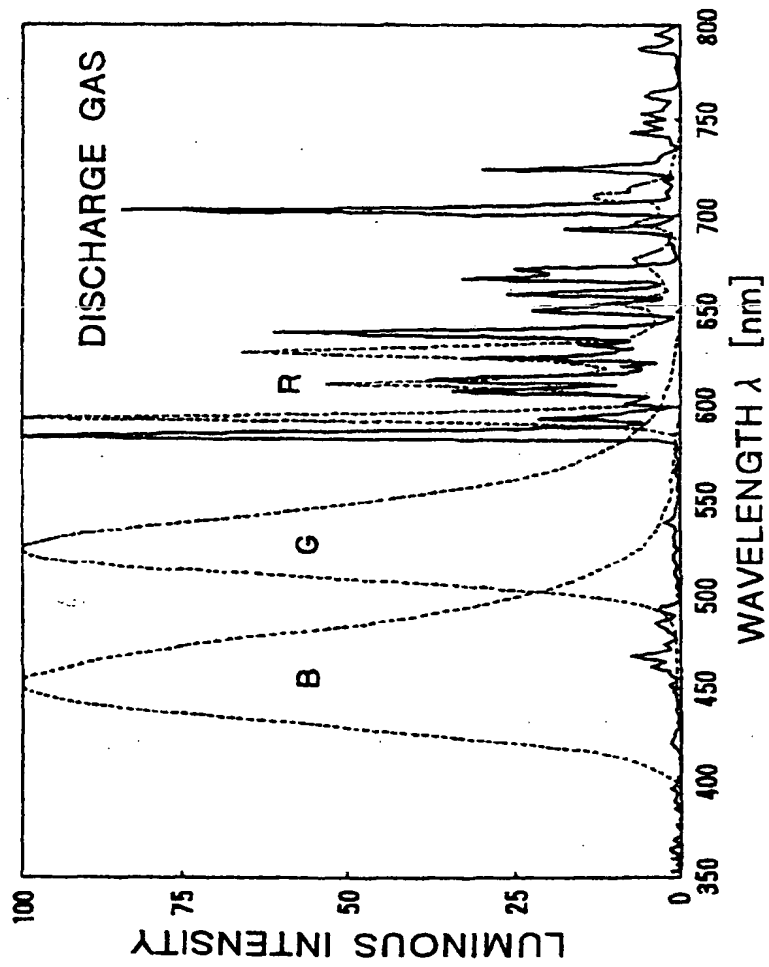


FIG. 13



(19)

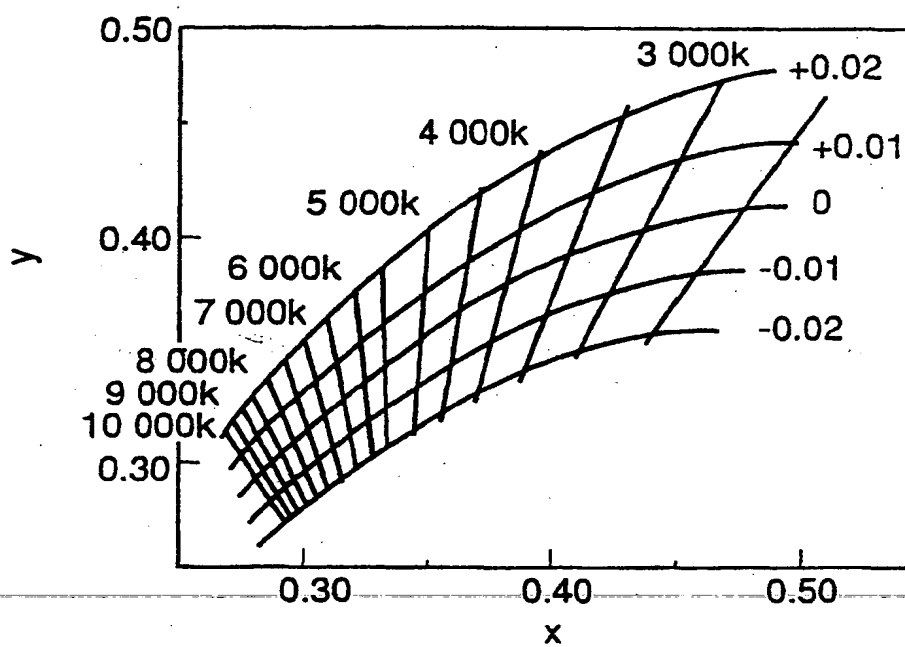

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 966 017 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
19.01.2000 Bulletin 2000/03

(51) Int. Cl.<sup>7</sup>: H01J 17/49, H01J 5/16

(43) Date of publication A2:  
22.12.1999 Bulletin 1999/51

(21) Application number: 99301043.8

(22) Date of filing: 12.02.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 18.06.1998 JP 17117998

(71) Applicant: FUJITSU LIMITED  
Kawasaki-shi, Kanagawa 211-8588 (JP)


(72) Inventors:  
• Irie, Katsuya,  
c/o Fujitsu Limited  
Kawasaki-shi, Kanagawa 211-8588 (JP)  
• Namiki, Fumihito,  
c/o Fujitsu Limited  
Kawasaki-shi, Kanagawa 211-8588 (JP)

(74) Representative:  
Hitching, Peter Matthew et al  
Haseltine Lake & Co.,  
Imperial House,  
15-19 Kingsway  
London WC2B 6UD (GB)

### (54) Gas discharge display device

(57) A gas discharge display device for displaying a color image by means of red, green and blue fluorescent substances, wherein a color to be reproduced by light-emission of the red, green and blue fluorescent substances for displaying a white pixel is set to be different from a white color intended for display, and a filter is disposed on a front side of the red, green and blue fluorescent substances for approximating a display color of the white pixel to the white color intended for display.

FIG. 5A

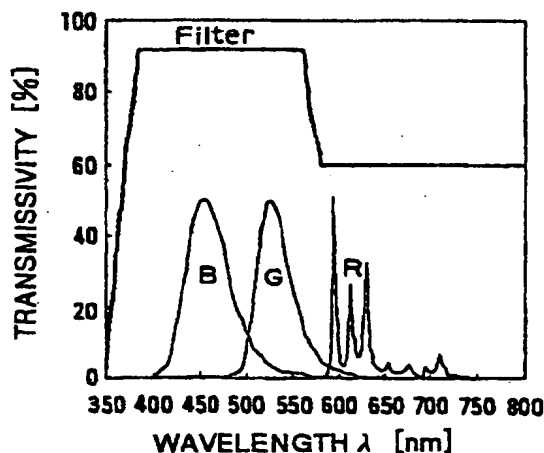

EP 0 966 017 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 1043

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 09, 30 September 1996 (1996-09-30) & JP 08 123364 A (FUJITSU GENERAL LTD), 17 May 1996 (1996-05-17) * abstract *	1	H01J17/49 H01J5/16
A	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 11, 29 November 1996 (1996-11-29) & JP 08 190869 A (MATSUSHITA ELECTRIC IND CO LTD), 23 July 1996 (1996-07-23) * abstract *	1	
A	EP 0 814 492 A (NIPPON ELECTRIC CO) 29 December 1997 (1997-12-29) * column 18, line 45 - line 49 *	1	
A	EP 0 523 633 A (CANON KK) 20 January 1993 (1993-01-20) * column 2, line 2 - line 8 *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H01J
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>29 November 1999</b>	Examiner <b>Noordman, F</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P4/C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 1043

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-11-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 08123364 A	17-05-1996	NONE	
JP 08190869 A	23-07-1996	NONE	
EP 0814492 A	29-12-1997	JP 10069859 A	10-03-1998
		CN 1171614 A	28-01-1998
EP 0523633 A	20-01-1993	JP 5068257 A	19-03-1993
		DE 69209578 D	09-05-1996
		DE 69209578 T	19-09-1996
		US 5398058 A	14-03-1995

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

